


### HF Urethane Cement System

#### SYSTEM DESCRIPTION

PUR-Guard™ HF is a 100% solid, heavy duty, 1/4" to 3/8" trowel applied cementitious urethane system with sand broadcast and a matte solid color finish.

#### SYSTEM COMPONENTS

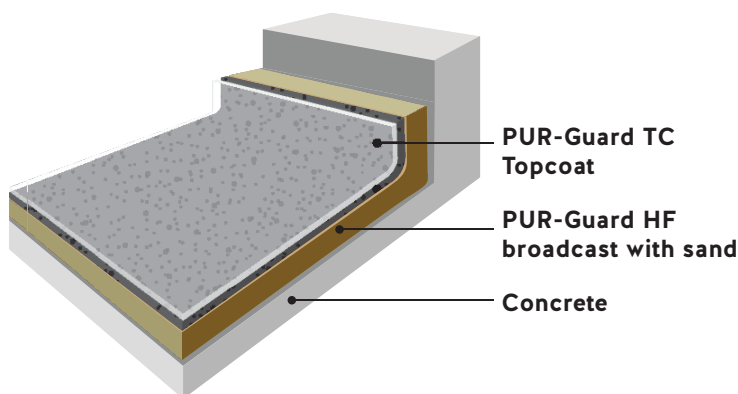

#### SYSTEM BENEFITS

- Meets FDA/USDA requirements
- Antimicrobial properties
- Withstands thermal shock up to 240°F
- High tolerance of moisture vapor transmission
- High abrasion and impact resistance
- Installs on green (10-day old) concrete
- Chemical resistant
- Matching seamless cove base for wall protection
- Designed specifically to withstand heavy impact and traffic
- Minimal maintenance costs


#### CURE TIME @ 70°F RH 50%

| PUR-GUARD | FOOT TRAFFIC | FULL CURE |
|-----------|--------------|-----------|
| HF        | 8-10 hours   | 24 hours  |
| TC        | 8-10 hours   | 24 hours  |




#### COLOR OPTIONS

PUR-Guard systems are available in several standard color options.




P-21 (Gray)




P-22 (Dark Gray)




P-23 (Black)



P-24 (Red)



P-25 (Green)



P-27 (Beige)



P-28 (Chocolate)

| APPLICATION CONDITIONS  |                       |
|-------------------------|-----------------------|
| Application Temperature | 60° to 80°F           |
| Substrate Temperature   | ≤ 5°F above dew point |
| Relative Humidity       | 25% - 80%             |

#### STANDARD PACKAGING

PUR-Guard products are sold in kits consisting of multiple components. Product properties require that containers provided are not completely filled. See price sheet for actual container weights and volumes.

#### STORAGE CONDITIONS

Store material in a cool and dry place out of direct sunlight. Do not store near open flame or ignition source. Read and understand all product labels and SDS sheets prior to use.

## PHYSICAL CHARACTERISTICS

| TEST METHOD                                              | RESULT                                                                                                   | TEST METHOD                                       | RESULT                                            |
|----------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------|---------------------------------------------------|
| <b>Compressive Strength</b><br>ASTM C579, (psi)          | 8,050                                                                                                    | <b>Impact Resistance</b><br>ASTM D2794            | No visible damage at minimum 160 in./lb.          |
| <b>Tensile Strength</b><br>ASTM C307, (psi)              | 1,460                                                                                                    | <b>Adhesion</b><br>ASTM D7234                     | Exceeds the tensile/cohesive strength of concrete |
| <b>Modulus of Elasticity</b><br>ASTM D2370 (lb./sq. in.) | 19,500                                                                                                   | <b>Coefficient of Friction</b>                    | > 0.5, meets or exceeds ADA recommendations       |
| <b>Hardness</b><br>ASTM D2240, Shore D                   | 88                                                                                                       | <b>Water Absorption</b><br>(ASTM C413, wt.%)      | < 0.1                                             |
| <b>Abrasion Resistance</b><br>ASTM D4060 (CS-17, mg)     | 20-30                                                                                                    | <b>VOC CONTENT</b><br>(ASTM D2369, EPA Method 24) | PUR-Guard HF: 0 g/L<br>PUR-Guard TC: 0 g/L        |
| <b>Moisture Vapor Transmission Limitations</b>           | Calcium Chloride (ASTM F-1869) 20 lb/1000 sq.ft./24 hrs, and 99% RH using in-situ RH probe (ASTM F-2170) |                                                   |                                                   |

The properties listed herein represent compiled data from individual component products within the system. Actual performance may vary based on installation conditions, substrate, environment, and system configuration. Not all values may be applicable to every installation. Field verification of suitability is the responsibility of the installer and design professional.

## PRIMING

If concrete out-gassing occurs resulting in surface irregularities, the substrate should be primed with PUR-Guard TC. The primed area should be allowed to dry tack free before proceeding with the body coat application. Installation of a test patch may be helpful to determine if priming is necessary.

## MOISTURE MITIGATION

For moisture mitigation above PUR-Guard limits, Calcium Chloride (ASTM F-1869) 20 lb/1000 sq.ft./24 hrs, or 99% RH using in-situ RH probe (ASTM F-2170), additional products are required. If waterproofing is required please consult your Res-Tek representative for more information

## COVE BASE

All Res-Tek floor systems can include an integral 4" or 6" cove base.

## WARRANTY

Res-Tek Inc. warrants material for 1 year if used and stored in accordance with Res-Tek's specified application procedure. Res-Tek Inc. has no responsibility for application and processing of products.

## SLIP RESISTANCE

Aluminum oxide or industrial silica can be added to the system to increase slip-resistance to the desired level. Please consult your Res-Tek representative for more information.

## CLEANING & MAINTENANCE

Res-Tek flooring systems require little routine maintenance. No stripping or waxing is required. However, a regular cleaning schedule will increase service life and aid in maintaining aesthetics. Please refer to the Cleaning & Maintenance Guide for specific instructions.

## MIXING & APPLICATION

Please refer to the Product Data Sheets and Application Guide for specific instructions.