


2 DAY METALLIC SYSTEM

- Upscale aesthetic with unlimited customization to create liquid metal, marble, or flowing water effects, making every floor a unique work of art
- The Epoxy Supraflow topcoat enhances the metallic pigments' luminous quality
- Epoxy Supraflow features extended working time
- Solid protection against stains, chemicals and everyday wear that is simple to maintain and easy to clean

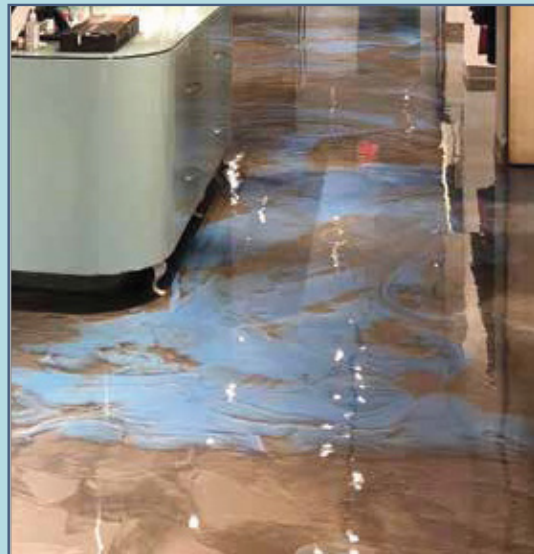

2 Day Metallic System

Base coat	Metallic coat	Optional Topcoat*
PurEpoxy PE-100 10-12 mils WFT 160-130 sq.ft./ga	PurEpoxy Supraflow 30-50 mils WFT 55-32 sq.ft./ga	2-4 mils WFT 800-400 sq.ft./ga

*Optional topcoat:

- Nanoshield (high gloss) 2-4 mils WFT, 800-400 sq.ft./ga
- P-AU100 (satin) 3-4 mils WFT, 530-400 sq.ft./ga

3

OPTIONAL TOPCOAT*

- Extended working time with a clear finish that enhances the metallic finish

2

DECORATIVE METALLIC COAT

- PurEpoxy Supraflow
- Premium metallic powder delivers a high-end reflective surface

1

BASE COAT- PurEpoxy PE-100 (Tinted)

- Provides a robust, long-lasting base for residential and commercial projects

CONCRETE SUBSTRATE

- Achieving optimal adhesion requires a clean, mechanically prepared substrate. Substrate must have a minimum Concrete Surface Profile (CSP) of 2 to 4. Crack Fillers (menders) provide fast, reliable filling for cracks, ensuring a smooth substrate.

* Concrete repair products include: PP-CF, PE-CF Fast, PE-CF Standard, PUR-CRR, PUR-CRE, and PUR-CRS (Urethane).

** Moisture Vapor Barrier. For any concrete slab with moisture issues, see our PurEpoxy MVB or VRM products.

Contact your local representative for our complete portfolio of moisture mitigation and crack repair solutions.